

# TERMILAM TAM


FILTRE ABSOLUTE LAMINARE USOR INLOCUIBILE H14



compozitie mediu filtrat	microfibra de sticla
rama	aluminiu anodizat
temperatura maxima de lucru	70 °C
eficienta M.P.P.S.	99.95 %
pierdere de presiune initiala	140 Pa
pierdere de presiune finala	600 Pa
clasificare (EN 1822)	H14

## APLICATII:

- Permite o rapida si simpla constructie si inlocuire pentru relizarea unei filtrari in locuri cu risc de contaminare ridicat, evitind utilizarea terminalelor fixe.
- Permite mofidicarea usoara sau imbunatirea instalatiilor existente.

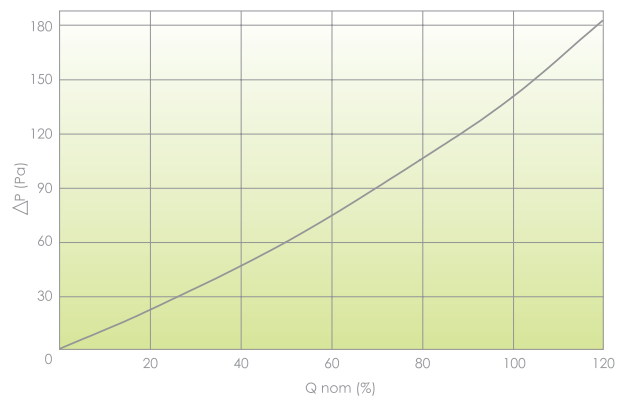

cod	dimensiune(mm)	presiune (m <sup>3</sup> /h)	diametru Ø (mm)
TM140808	203 x 203 x 150	70	148
TM141212	305 x 305 x 150	150	148
TM141224	305 x 610 x 150	300	198
TM141818	457 x 457 x 150	330	198
TM141824	457 x 610 x 150	450	198
TM142222	592 x 592 x 150	570	248
TM142424	610 x 610 x 150	600	248
TM142436	610 x 914 x 150	900	248
TM142244	590 x 1.190 x 150	1.150	248
TM142448	610 x 1.219 x 150	1.200	248

\*NB: Toate filtrele vin insotite de certificat de calitate si sunt verificate individual coform normelor europene in vigoare EN 1822.