
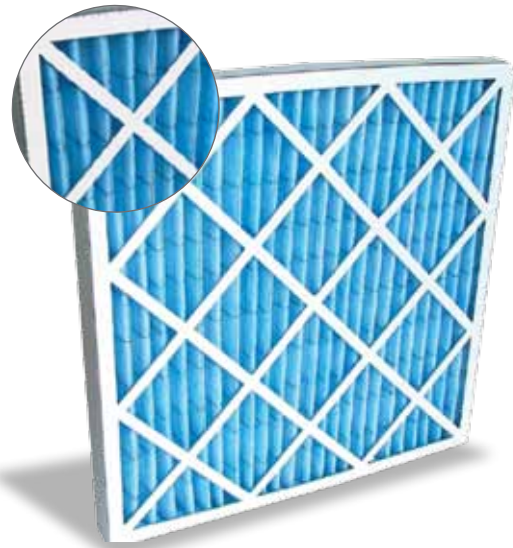


compozitie mediu filtrat	poliester
rama	carton
temperatura maxima de lucru	90 °C
eficienta medie gavimetrica	90 %
clasificare (EN 779:2002)	G4
grad de inflamabilitate	F1 - DIN 53438
regenerabil	NU

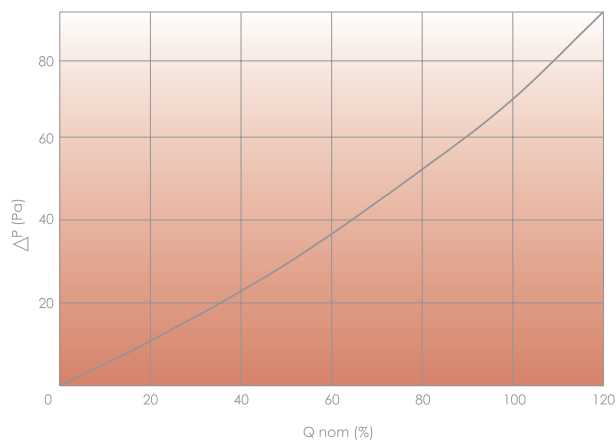

### APLICATII:

- Centrale de tratare aer.
- Instalatii cu debite mari de aer.
- Pre-filtrare si separarea particulelor unde este ceruta de o pierdere de presiune pe filtru mica.

cod	dimensiuni (mm)	suprafata filtrata (m <sup>2</sup> )	presiune (m <sup>3</sup> /h)	ΔP (Pa)	greutate (kg)
WE16161	394 x 394 x 22	0,27	580	70	0,22
WE16251	394 x 621 x 22	0,40	900	70	0,28
WE20201	494 x 494 x 22	0,40	900	70	0,29
WE20251	494 x 621 x 22	0,50	1.080	70	0,30
WE12241	287 x 592 x 22	0,28	600	70	0,34
WE20241	490 x 592 x 22	0,47	1.010	70	0,40
WE24241	592 x 592 x 22	0,57	1.230	70	0,43
WE16162	394 x 394 x 47	0,43	930	70	0,44
WE16252	394 x 621 x 47	0,68	1.470	70	0,54
WE20202	494 x 494 x 47	0,68	1.470	70	0,50
WE20252	494 x 621 x 47	0,87	1.880	70	0,67
WE12242	287 x 592 x 47	0,48	1.040	70	0,38
WE20242	490 x 592 x 47	0,80	1.730	70	0,67
WE24241	592 x 592 x 47	0,96	2.070	70	0,69
WE16164	394 x 394 x 95	0,76	1.640	70	0,72
WE16254	394 x 621 x 95	1,20	2.590	70	0,90
WE20204	494 x 494 x 95	1,20	2.590	70	0,83
WE20254	494 x 621 x 95	1,50	3.240	70	1,10
WE12244	287 x 592 x 95	0,82	1.770	70	0,67
WE20244	490 x 592 x 95	1,40	3.020	70	1,10
WE24244	592 x 592 x 95	1,64	3.540	70	1,17