


compozitie mediu filtrat	microfibra sintetica
rama metalica	otel zincat
temperatura maxima de lucru	90 °C
eficienta colorimetrica	60-65%
clasificare (EN 779:2002)	F6
grad de inflamabilitate	F1 - DIN 53438
regenerabil	NU

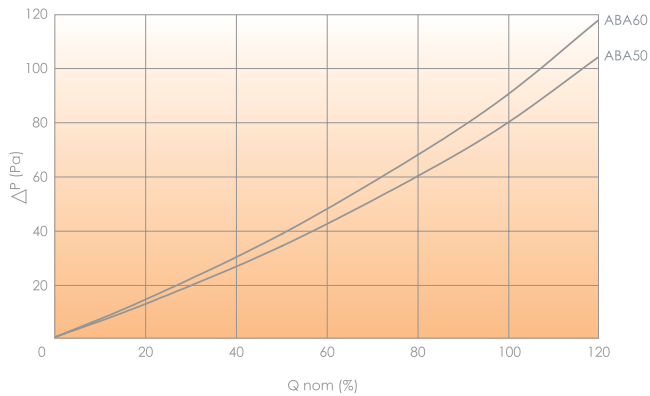

APLICATII:

- Instalatii de ventilatie si climatizare pentru separarea particulelor fine si aerosoli.
- Filtrarea finala a particulelor din suspensii.

cod	cod	dimensiuni (mm)	nr. de saci	suprafata filtra- ta (m ²)	presiune (m ³ /h)	ΔP (Pa)	
						ABA50	ABA60
ABA50	ABA60						
AB45336	AB65336	287 x 592 x 360	3	1,28	2.080	80	90
AB45350	AB65350	287 x 592 x 500	3	1,78	2.880	80	90
AB45360	AB65360	287 x 592 x 620	3	2,20	3.570	80	90
AB45436	AB65436	490 x 592 x 360	4	1,70	2.770	80	90
AB45450	AB65450	490 x 592 x 500	4	2,37	3.840	80	90
AB45460	AB65460	490 x 592 x 620	4	2,94	4.760	80	90
AB45536	AB65536	592 x 592 x 360	6	2,56	4.150	80	90
AB45550	AB65550	592 x 592 x 500	6	3,55	5.760	80	90
AB45560	AB65560	592 x 592 x 620	6	4,40	7.140	80	90