

ALFABAG ABA30-ABA40


FILRE CU SACI G3- G4



compozitie mediu filtrat	poliester
rama	otel zincat
temperatura maxima de lucru	90 °C
viteza aerului, recomandata	1.5 m/s
eficienta medie gavimetrica	ABA30=87 % ABA40=90%
clasificare (EN 779:2002)	ABA30=G3 ABA40=G4
grad de inflamabilitate	F1 - DIN 53438
regenerabil	NU

APLICATII:

- Pre-filtrare si filtrare in instalatii industriale sau civile cu debite mari de aer.
- Pre-filtrare pentru filtrele absolute.
- ABA-T versiune cu saci lipiti la cald, recomandati pentru ceata de ulei si fum.

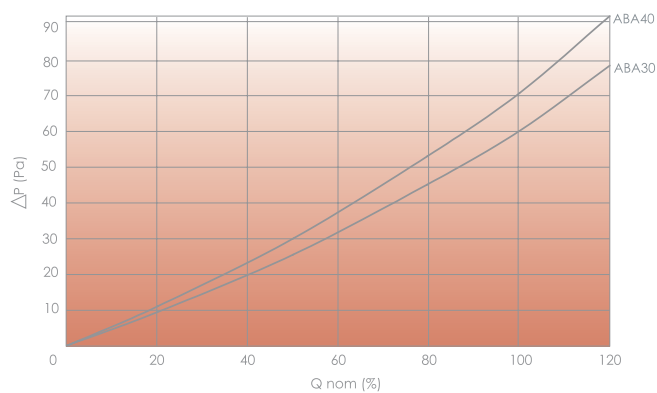

cod	cod	dimensiuni (mm)	saci	suprafata filtrata (m ²)	presiune (m ³ /h)	ΔP (Pa) ABA30	ΔP (Pa) ABA40
ABA30	ABA40		(nr)				
AB25319	AB35319	287 x 592 x 190	3	0,67	1.100	60	70
AB25336	AB35336	287 x 592 x 360	3	1,28	2.080	60	70
AB25350	AB35350	287 x 592 x 500	3	1,78	2.880	60	70
AB25360	AB35360	287 x 592 x 620	3	2,20	3.570	60	70
AB25419	AB35419	490 x 592 x 190	4	0,90	1.460	60	70
AB25436	AB35436	490 x 592 x 360	4	1,70	2.770	60	70
AB25450	AB35450	490 x 592 x 500	4	2,37	3.840	60	70
AB25460	AB35460	490 x 592 x 620	4	2,94	4.760	60	70
AB25519	AB35519	592 x 592 x 190	6	1,35	2.190	60	70
AB25536	AB35536	592 x 592 x 360	6	2,56	4.150	60	70
AB25550	AB35550	592 x 592 x 500	6	3,55	5.760	60	70
AB25560	AB35560	592 x 592 x 620	6	4,40	7.140	60	70