


FILTERCEL CFW30 CFW40


CELULE FILTRANTE PLAN ONDULATE G3-G4

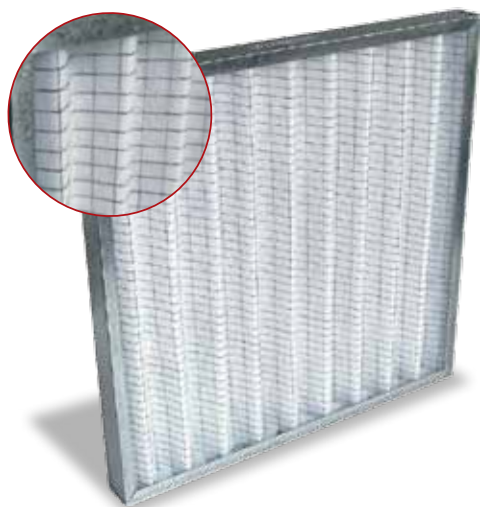

compozitie	fibra de polyester
rama metalica	otel zincat
temperatura maxima de lucru	100 °C
eficienta medie gavimetrica	89,8-90,8 %
clasificare (EN 779:2002)	G3-G4
grad de inflamabilitate	F1 – DIN 53438
regenerabil	DA

APLICATII:

- Ventilatie in industrie si climatizare rezidentiala.
- Centrale de tratare aer, pereti filtranti.
- Pre-filtrare si separarea particulelor grosiere si fine.
- Pre-filtrare pentru filtrarea absoluta.

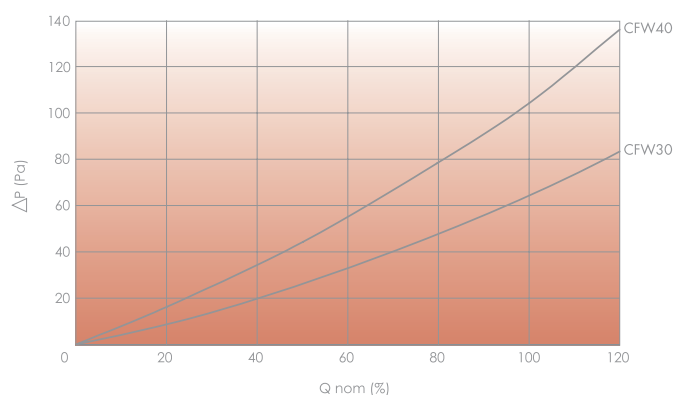

cod CFW30	cod CFW40	dimensiuni (mm)	suprafata filtrata (m ²)	presiune (m ³ /h)	ΔP (Pa) CFW30	ΔP (Pa) CFW40
LP312242	LP412242	287 x 592 x 48	0,29	1.570	64	110
LP316162	LP416162	400 x 400 x 48	0,27	1.480	64	110
LP316202	LP416202	400 x 500 x 48	0,34	1.850	64	110
LP316252	LP416252	400 x 625 x 48	0,43	2.330	64	110
LP320242	LP420242	490 x 592 x 48	0,50	2.730	64	110
LP320202	LP420202	500 x 500 x 48	0,42	2.310	64	110
LP320252	LP420252	500 x 625 x 48	0,53	2.860	64	110
LP324242	LP424242	592 x 592 x 48	0,60	3.240	64	110
LP312302	LP412302	287 x 879 x 48	0,43	2.320	64	110
LP312244	LP412244	287 x 592 x 98	0,34	1.840	64	110
LP316164	LP416164	400 x 400 x 98	0,32	1.760	64	110
LP316204	LP416204	400 x 500 x 98	0,40	2.190	64	110
LP316254	LP416254	400 x 625 x 98	0,50	2.730	64	110
LP320244	LP420244	490 x 592 x 98	0,58	3.170	64	110
LP320204	LP420204	500 x 500 x 98	0,50	2.730	64	110
LP320254	LP420254	500 x 625 x 98	0,62	3.380	64	110
LP324244	LP424244	592 x 592 x 98	0,70	3.790	64	110
LP312304	LP412304	287 x 879 x 98	0,51	2.780	64	110